

High Quality Inkjet Printer

Negijet K-3300 Pro The KM 1024i-C8K is an ultra-high-speed inkjet printer featuring a robust and stable frame, designed specifically to enhance production capacity and support batch production needs.




Negijet K-3300 Pro

KONICA 1024I SERIES INKJET PRINTER



Refresh the speed of mass-produced inkjet printer again, super high 500m²/h BYHX accessories imported original accessories

500m²/h

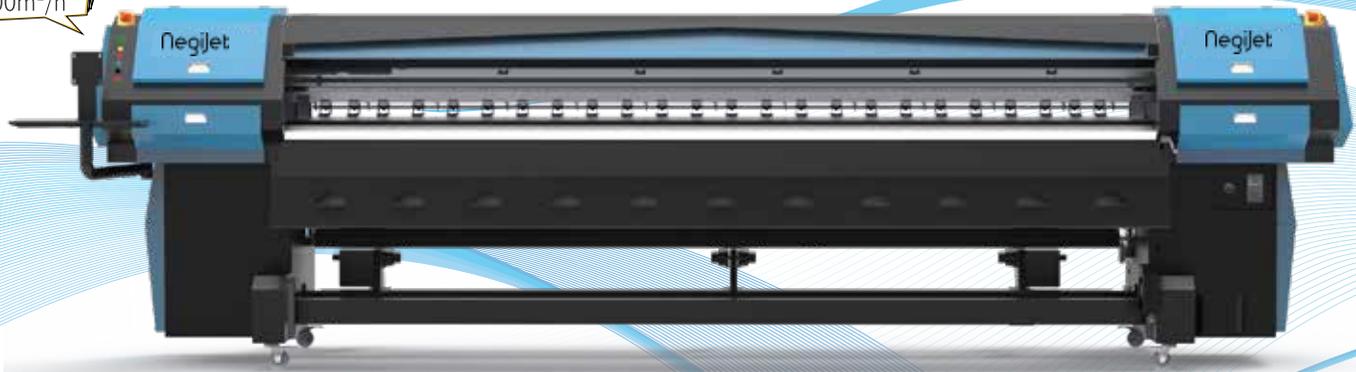

Accessories Details



SEPERATE MACHINE HEATING POWER SUPPLY



HEAD MOISTURIZING SYSTEM



ONE HEAVY FRAME



INDUSTRIAL-GRADE FEEDING AND TAKE UP STRUCTURE



THE HEIGHT OF THE BOTTOM PLATE CAN BE ADJUSTED FREELY



INDUSTRIAL-GRADE FEEDING AND TAKE UP STRUCTURE


Application Scenarios




Billboards



Building wraps




Transit advertising



Large-scale banners

Konica Nozzle Configuration Scheme



TWO ROWS OF FOUR COLORS (FULL COLOR MODE)

Negijet K-3300 Pro

Technical parameters of equipment

FEATURES

- **High Production Speed:** Equipped with KM1024i print heads, providing 1.5 times more efficiency compared to KM 512i models.
- **Separate Control of Power Supply:** Reduces electromagnetic interference, extending the longevity of the equipment.
- **Automatic Nozzle Moisturizing System:** Protects print heads automatically after operation, ensuring consistent performance.
- **Adjustable Bottom Plate:** Easily adapts to different material thicknesses for versatile printing.

TECHNICAL PARAMETER

PARAMETER NAME	Technical configuration			
PRINthead CONFIGURATION	KM512i / KM1024i			
PRINTING RESOLUTION	480DPI/540DPI/720DPI			
COLOR MODE	Four colors			
MATERIAL THICKNESSE	2MM			
CURING SYSTEM	INFRARED HEATING + FANS			
SUCTION PLATFORM	Partition suction adapts to various materials			
PRINT SIZE	Maximum width 3200MM			
INK	Solvent ink			
INK TANK CAPACITY	5000ML Volume ink,AUTOMATIC INK SHORTAGE ALARM AND INK SUPPLY SYSTEM			
PRINT MATERIAL	Light box cloth/Body stickers/Canvas/Mesh, ETC.			
OPERATING SYSTEMML	Win11/Win10/Win7 64Bit RAM≥8G			
PRINTING SPEED	KM 512i	Draft Mode	Production Mode	High Precision Mode
		240m ² /h	180m ² /h	120m ² /h
	KM 1024i	Draft Mode	Production Mode	High Precision Mode
		500m ² /h	260m ² /h	200m ² /h
RIP SOFTWARE	Photoprint/MainTop/UltraPrint			
WORKING ENVIRONMENTE	Temperature	15°C~30°C will more effectively control the impact of static electricity on the printing		
	Humidity	40%~80% can effectively control static electricity and ensure print quality		
POWER SUPPLY	Maximum Power: 3.2KW AC:220V(±10%) > LSA, 50~60HZ			
FILE FORMAT	TIFF、JPEG、EPS、PDF、PSD			
DIMENSIONS	4970x1080x1440mm			
TOTAL WEIGHT	900KG			
SAFETY CERTIFICATE	CE Certification SGS Certification			

Negi Sign Systems & Supplies Co.

Mumbai Head Office
301, Shivam Chambers,S.V.Road, Goregaon
West, Mumbai- 400104.

Delhi Regional Office
C-75, DDA Sheds, Okhla Industrial Area,
Phasel, New Delhi- 110020.

 : 8433908690

Tel no : 022- 61566000
Tel no : 011- 49139900

Email id : Sales@negisign.com

Website : www.negisign.com

