

UV HYB-2500H
Inkjet Printer series



With Ricoh Gen5/Gen6 Inkjet Print Head

5pcs Ricoh Gen5 Heads(2+1+2)

	CMYK	CMYK+W	CMYK+W+CMYK
4PASS - PRODUCTION MODE:	45 sqm/h	36 sqm/h	25 sqm/h
6PASS - QUALITY MODE:	36 sqm/h	24 sqm/h	17 sqm/h
8PASS - HIGH QUALITY MODE:	21 sqm/h	18 sqm/h	13 sqm/h




CMYK / CMYKLCm + W + Varnish

TECHNOLOGY HIGHLIGHTS

- Standard extension platform, perfect to print both roll and rigid media.
- High Performance LED curing UV Inks ensures high printing bandless quality.
- Adjustable head height, Laser positioning system and movable printing platform result in high-efficiency printing jobs.
- Air-shaft take-up system makes more stable media winding.
- Stable printing technology and ink supply system reduces maintenance cost.
- Bundled with genuine ONYX RIP Center RIP / Photoprint software.



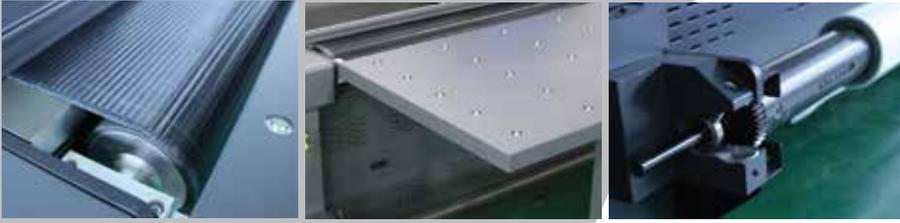

Integrated belt and flatbed media feeding system is competent to print both roll and rigid media. Folding extension frame saves space and cost as well. Air-shaft take up system makes more stable media winding .

Dual THK guide rails ensure high quality printing output. The front pressure bar makes the material more smoothly, ensuring the accuracy of printing. Automatic height measurement system , adjusts the distance between the baseplate and the media automatically to guarantee the best quality.



Multifunctional vacuum platform is divided into six areas to control accordingly with adjustable vacuum power. The material is always flat during the printing process to avoid wrinkling. Bulk ink with ink alarm system ensures long-term stable printing.

Technical Data.

MODEL	Glen HYB-2500 Inkjet Printer
PRINTHEAD TYPE	Ricoh Gen5 / Gen6 Inkjet print head
HEAD NUMBER	3-12 pcs optional
PRINTING SIZE (W*D)	2500(X)*1000mm(Y)
PRINTING TECHNOLOGY	Gray scale piezo-electric inkjet technology
MAXIMUM RESOLUTION	2400dpi
INTERFACE	USB 2.0
INK TYPE	Led UV Inks Ink Supply System (2.5L Ink Tank) C/M/Y/K/Lc/Lm/W/Varnish
MEDIA THICKNESS	≤50mm
COLOR CONTROL	ICC Color Profiling
RIP SOFTWARE	ONXY Rip Center / Photoprint
ENVIRONMENT	Temperature: 18 °C -26 °C , Humidity: 30%-75% (RH)
POWER CONSUMPTION	Printing mode: 5000 W Sleep mode : 600W
PRINTER DIMENSION	4,500(L) x1,132(W) x 1540H)(Unit : mm)
PACKING WEIGHT	2000 kg
PACKING DIMENSION	2,690(L) x 500(W) x 100H)(Unit : mm)

**2400
dpi**

Max Resolution



Simple Operation



Variable Drop



Continuous printing



Negi Sign Systems & Supplies Co.

Mumbai Head Office

301, Shivam Chambers, S. V. Road, Goregaon West, Mumbai- 400104.

Delhi Regional Office

C-75, DDA Sheds, Okhla Industrial Area, Phasel, New Delhi- 110020.

 : 8433908690

Tel no: 022- 61566000
Tel no: 011- 49139900

Email id : Sales@negisign.com

Website : www.negisign.com

