


NJ-1800H

Refactored design More widely used
HIGH-END UV Hybrid Printer

Epson original print head :i3200-U1 printing width:1830mm

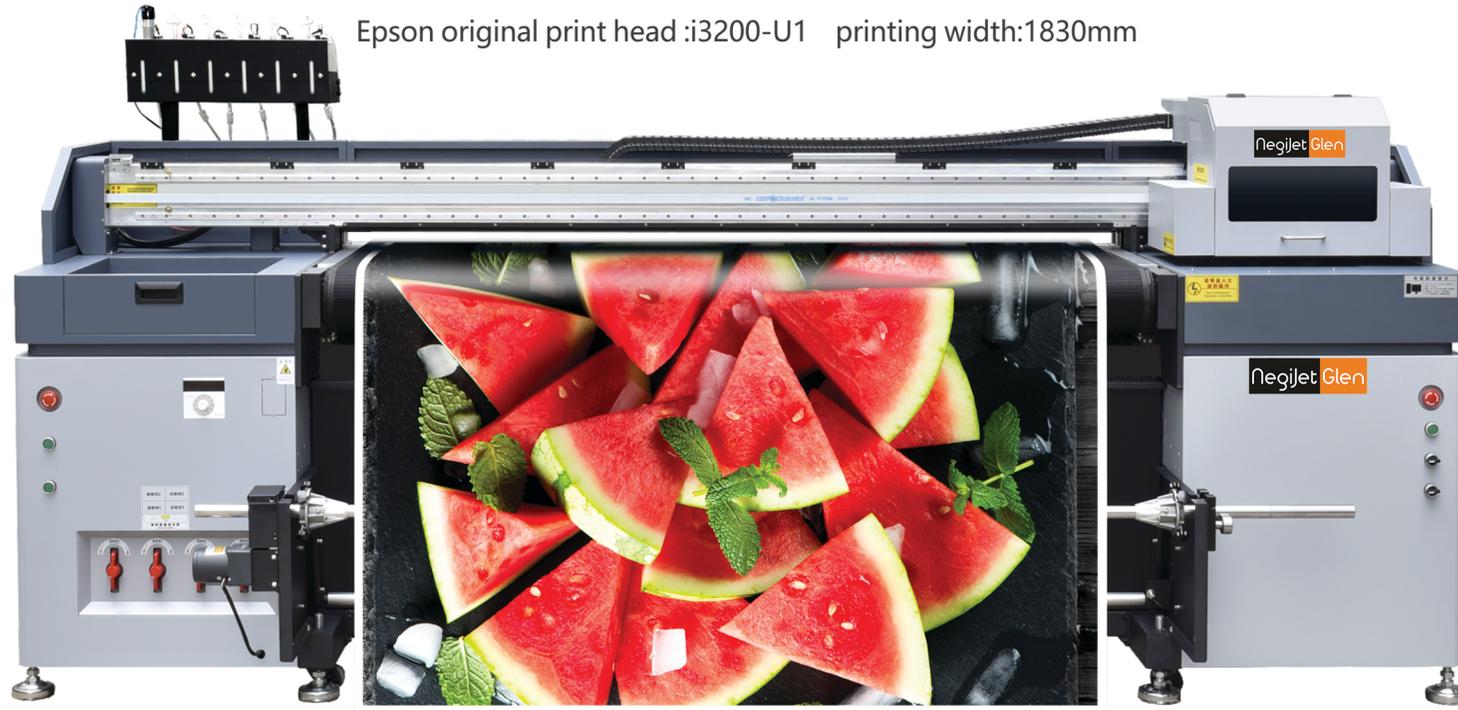

Epson original print head printing speed

Print head	i3200-A1/E1	i3200-U1
Speed		
Production	105m ² /h	72m ² /h
Precision	80m ² /h	48m ² /h
High quality	55m ² /h	38m ² /h

The mesh belt printing platform greatly expands the business scope of customers

1. Adopt the mesh belt suction printing platform, through the industrial-grade high-power fan, the platform is printed with materials, the transmission is stable, and the adsorption force is strong.
2. Through the powerful suction function, it avoids pulling, wrinkling, adhesion, etc. when the material is printed, and the whole material is very flat.



Intelligent printing and high-quality mechanical design



High-quality mechanical structure, the Printer is more stable

1. Using imported THK noiseless guide rail
2. High precision aluminum alloy integrated beam;
3. Double servo motor control;
4. High quality mechanical components ensure the smooth operation, high speed and accuracy of the Printer in the printing process.



It can print on roll material, also can print on sheet

I3200-U1 is used for transparent glass stickers, transparent PVC film, 3P cloth, etc.
I3200-A1/E1 is used for wall paper, leather etc.



UV light intensity adjustment Flexible handling of various printing materials

The UV lamps on both sides of the nozzle can easily adjust the intensity of the UV lamps on the left and right sides through the cold water tank, which can better handle heat-sensitive materials and self-adhesive materials and control the odor of cured ink.



Intelligent receiving and discharging system

Intelligent receiving and discharging system, time-saving, labor-saving and high-efficiency printing.

Product Specifications

*Specification do as present one, if there is a change without notice.

Model	NJ-1800H	Media type	Transparent glass sticker, transparent PVC film, 3P cloth, Wall cloth leather etc
Print head type	i3200-U1/i3200-A1/i3200-E1	Rip Software	Maintop6.0uv, PhotoPrint19
Print head number	1-6pcs	Media collection device	High-power fully automatic retraction system (standard)
Ink Color	CMYK/CMYK + LC + LM + W + V	Power Parameters	200-240 V, 50/60 Hz, 32A
Cartridge Capacity	1500ml/color	Print interface	USB3.0
Ink supply	Negative pressure continuous ink supply	Operating environment	Independent, clean, low dust, little light, well-ventilated working space working temperature: 20C-28C; Operating humidity: 40% - 70% (non-condensing)
Pre-image Quality Detection	LED Light Guide	Operating languages	Chinese/English
Printing Size	1820mm	Operating System	Win7 / Win10
Printhead Height	80 mm	Printer Size	3330mmx1370mmx1535mm(LxHxW)
Image file format	JPG/TIFF/PDF/PSD		



NEGI SIGN SYSTEMS & SUPPLIES CO.

Mumbai : 301, Shivam Chambers, Next To Sahara, S.V. Road, Goregaon west, Mumbai-400104, Tel : 022-61566000

Delhi : C-75, DDA Sheds, Okhla Industrial Area, Phase-1, New Delhi- 110020, Tel : 011-49139900

E-mail : sales@negisign.com, **Website** : www.negisign.com

Whats app : 8433908690

