



High-speed Magnetic Levitation UV Flatbed Printer



Original print head: Konica nozzle / RicohGn6 Width:2500X1300mm/ 3000X2000mm



NJ UV-2513 Plus

Upgrade configuration-linear motor (magnetic levitation)

Linear motor has fast response and high precision
The noise is low, and the operation is more stable
The speed of the trolley increases,
Greatly improve work efficiency.




Intelligent printing and high-quality mechanical design



Imported silent rail



Anti-collision device on both side of the cart for print head protection

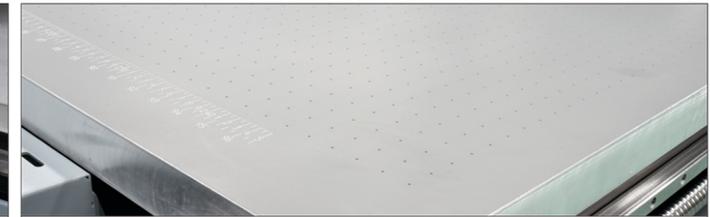

Suction platform was divided to 4parts, each one can be controlled separately, more energy-saving



Ink temperature control system: Ink temperature can be controlled as requirement



Automatic nozzle height measuring device



Monochrome pressure ink cleaning

Product Specifications

*Specification do as present one, if there is a change without notice.

Model	NJ UV-2513 Plus	Media thickness	121 mm	
Print wide	2500x1300mm	Medium	Sheets (glass, acrylic, aluminum-plastic panels, wood panels, PVC panels, foam panels, 3C products, organic panels, ceramics, foam panels, metal panels, plastics, fabrics, leather, ceramic tiles, etc.)	
Printhead	Konica 1024i/ Ricoh gen6			
Number of nozzle	2- 12pcs	Attached platform	Vacuum adsorption media fixed platform	
Output accuracy	635×600dpi /635×900dpi/635×1200dpi	RIP software	Photoprint, Onyx (optional)	
Single line printing speed	Sketch mode	23.8m ² /h	File format	TIFF, JPEG, POSTSCRIPT, EPS, PDF
	Production mode	21m ² /h	Interface	High-speed USB3.0
	Quality mode	16.8m ² /h	Operating system	Win7/10 64
Ink type	Use LED environmentally friendly, colorful, outdoor durable UV ink (excluding VOC)	Input voltage	200-240VAC, unidirectional, 50/60HZ, 32A	
Color configuration	CMYK + Lc + Lm + W + V Support double white and varnish printing	Power	4500W	
Ink bottle configuration	3500ml per color of main ink cartridge	Printer Size & Weight	4500mm×2200mm×1500mm(L×W×H)&1500kg	
Ink supply method	Negative pressure continuous ink supply mode	Packing size & weight	4600mm×2300mm×1700mm(L×W×H)&1600kg	



NEGI SIGN SYSTEMS & SUPPLIES CO.

Mumbai : 301, Shivam Chambers, Next To Sahara, S.V. Road, Goregaon west, Mumbai-400104, Tel : 022-61566000

Delhi : C-75, DDA Sheds, Okhla Industrial Area, Phase-1, New Delhi- 110020, Tel : 011-49139900

E-mail : sales@negisign.com, Website : www.negisign.com

Whats app : 8433908690

